

FIG. 1

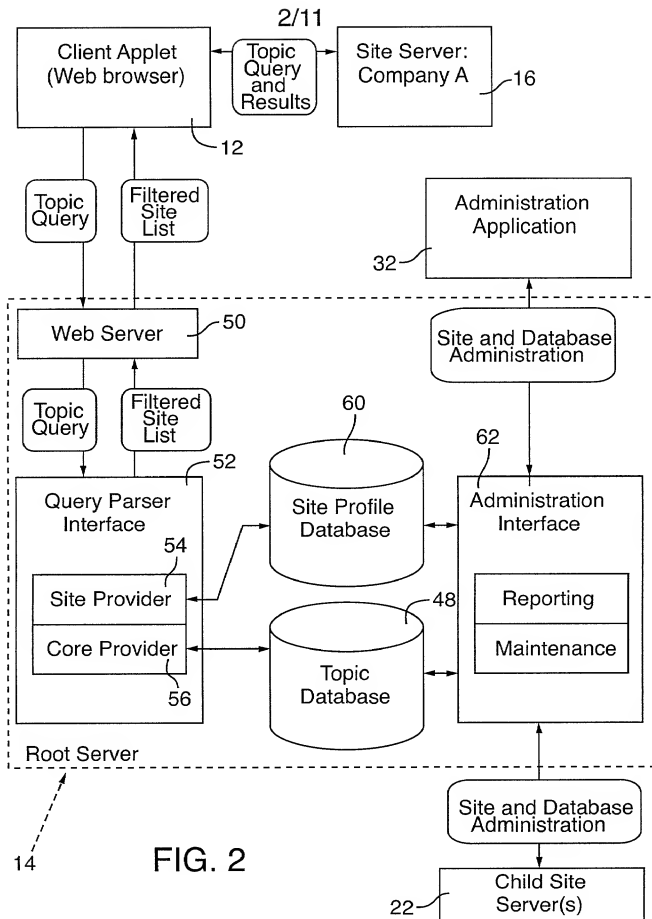
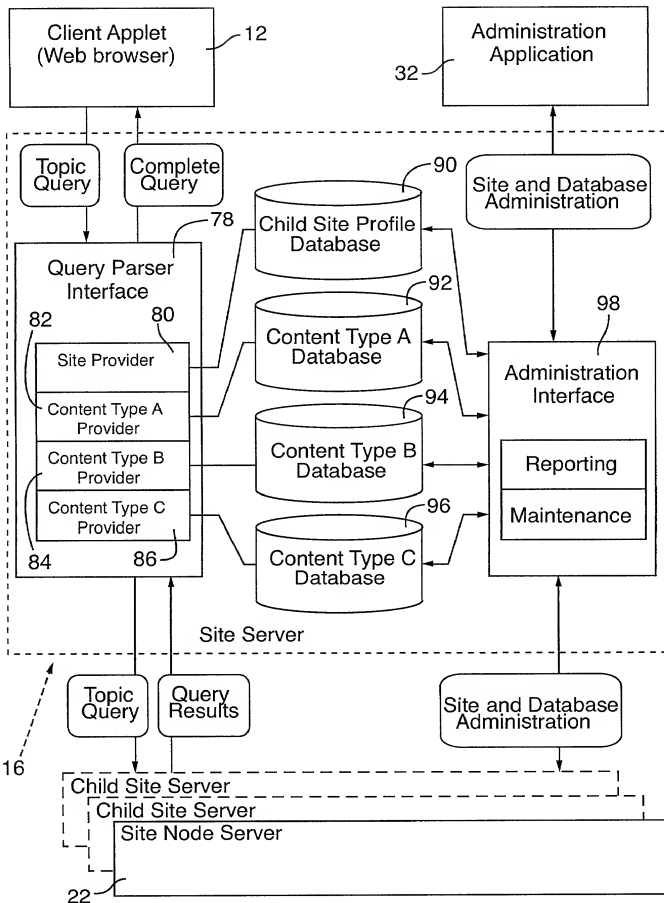


FIG. 2

FIG. 3

3/11






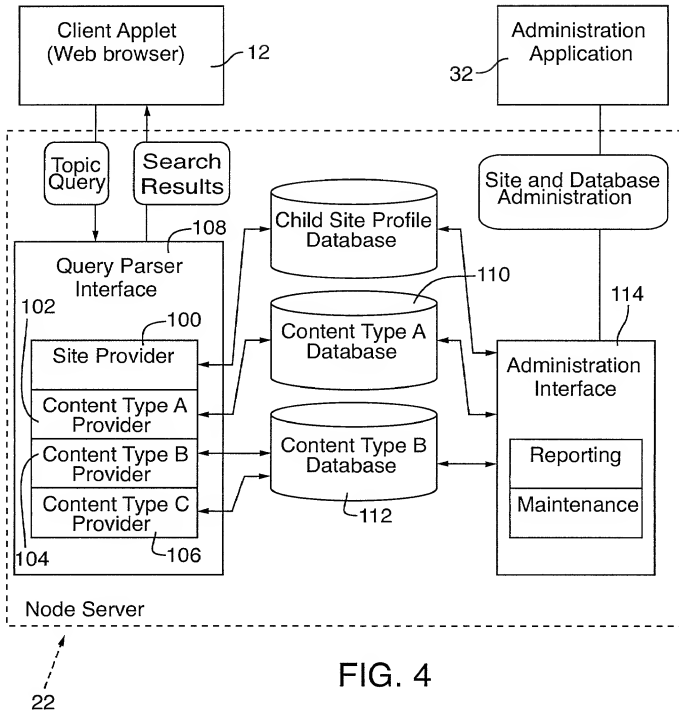


FIG. 4


FIG. 5

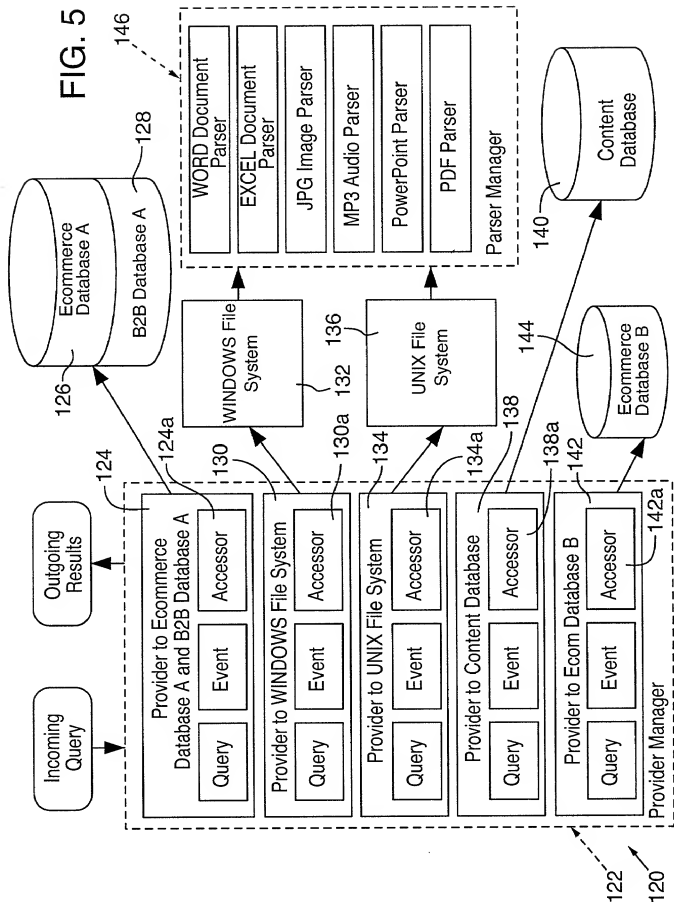

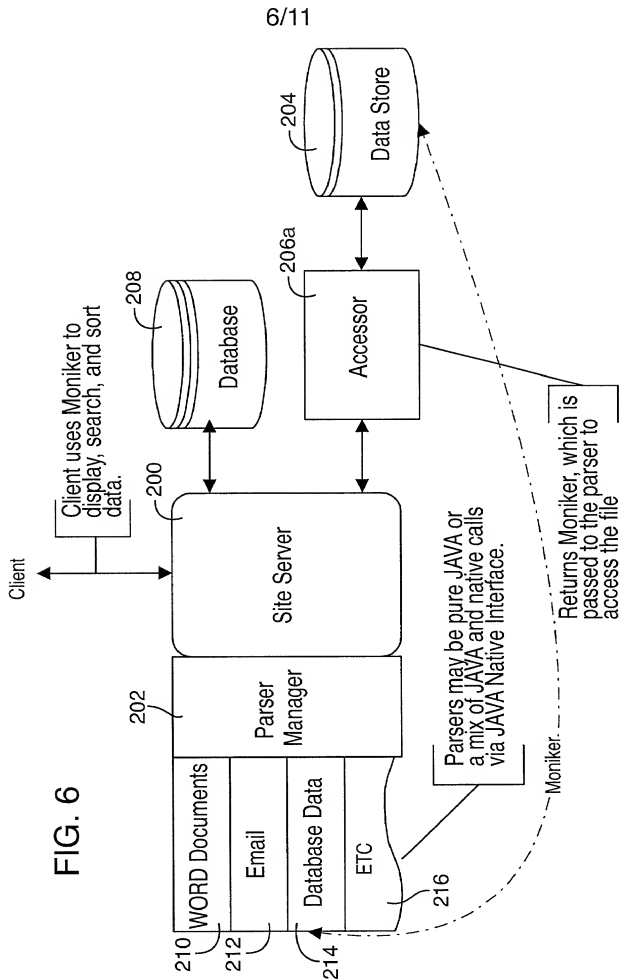

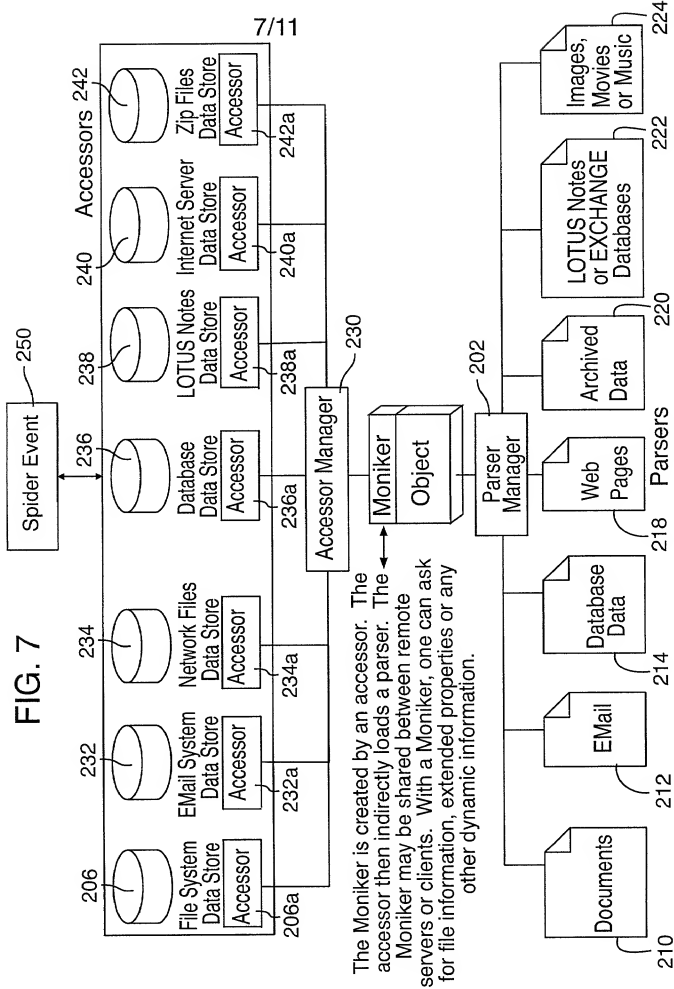


The Moniker is created by an accessor. The accessor then indirectly loads a parser. The Moniker may be shared between remote servers or clients. With a Moniker, one can ask for file information, extended properties or any other dynamic information.

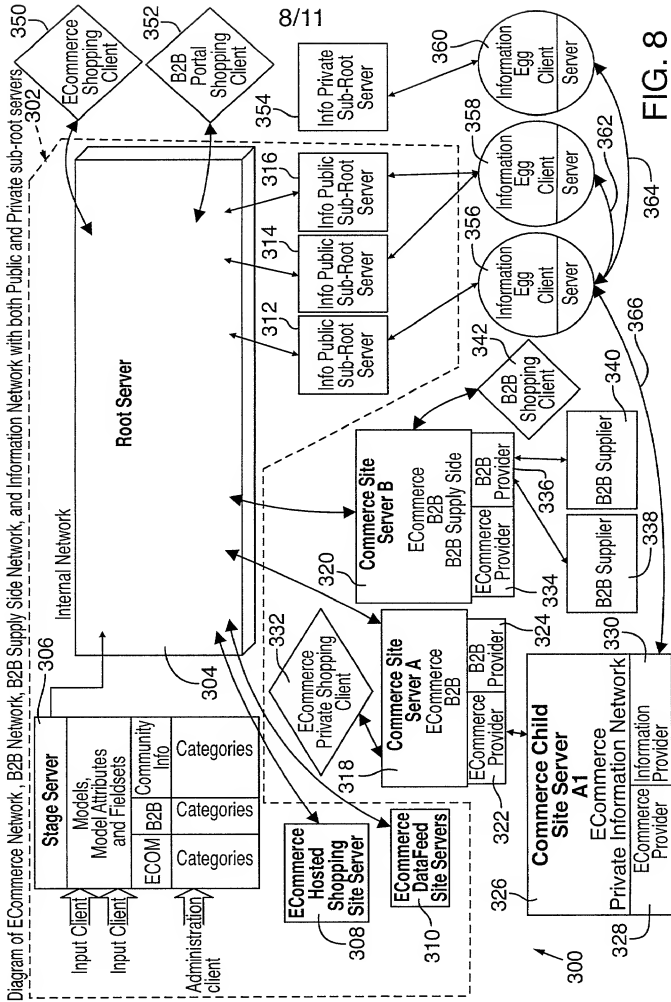

9/11

Egg Client Server Detail

FIG. 9

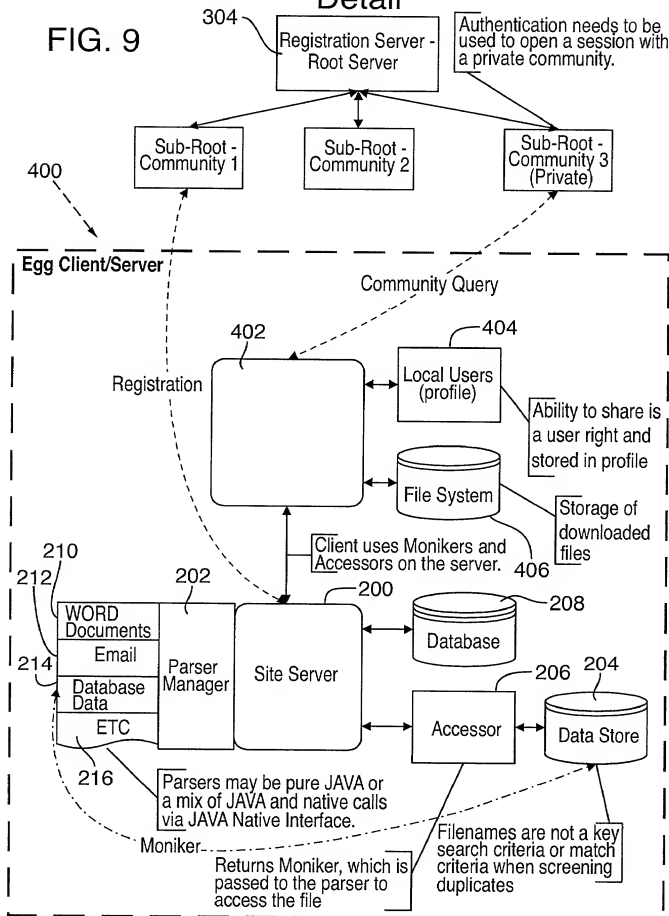

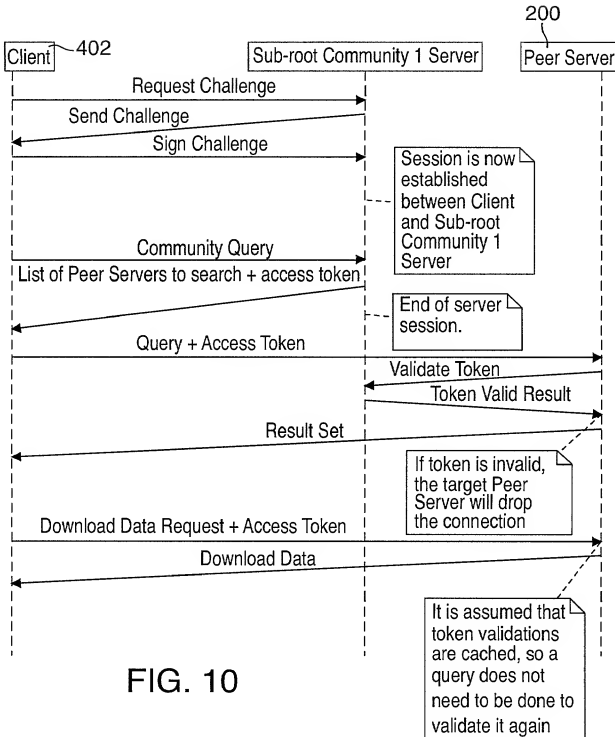


FIG. 10

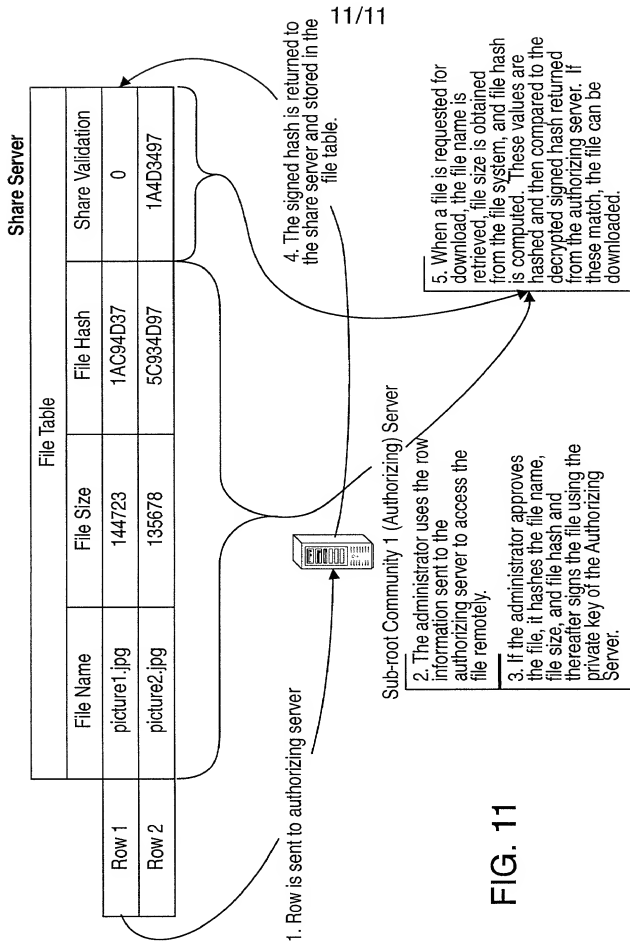


FIG. 11